



Line Post Insulators




The following line post insulators comply with the American Standard ANSI, The glaze colour of the insulators are brown or light gray, etc,. The dimension of neck is in accordance with "F".

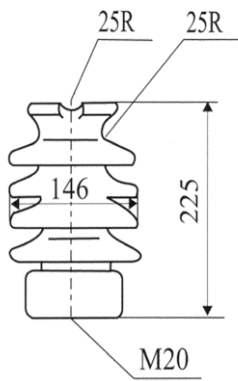

ANSI Class 57-1

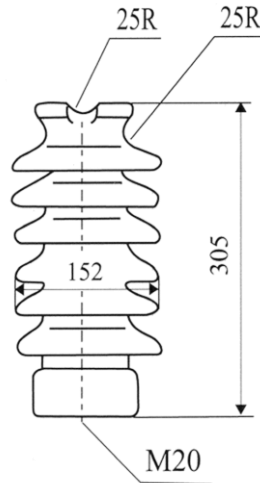

ANSI Class 57-2

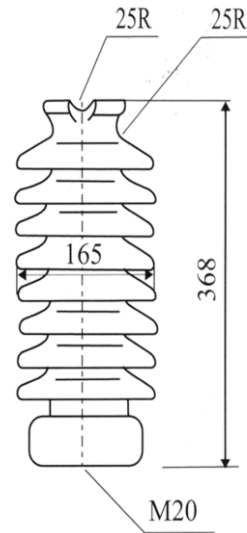

ANSI Class 57-3

Standard Specification : ANSI C29.7

Catalog Number		5701	5702	5703
ANSI Class		57-1	57-2	57-3
Stud Cat No.		5701-2 or 5701L-1	5706-2 or 5706L-1	5706-2 or 5706L-1
Creepage Distance	mm	356	559	737
Dry Arcing Distance	mm	165	241	311
Cantilever Strength	kN	12.5	12.5	12.5
Low Frequency Flashover Voltage	Dry	kV	80	110
	Wet	kV	60	85
Critical Impulse Flashover Voltage (1.2 X 50 μ m)	Positive	kV	130	180
	Negative	kV	155	205
Radio Influence Voltage	Test voltage	kV	15	22
	Max. RIV at 1000KHz	μ V	100	100
Net Weight, Each, Approx.	kg	5.2	9.0	11.0
Number in Standard Package	pcs	6	3	3

Notes : These catalog numbers represent the unit without stud. See page 12 for stud.

