





The following line post insulators comply with the American Standard ANSI, The glaze colour of the insulators are brown, light gray, etc.,. The dimension of neck is in accordance with "N".

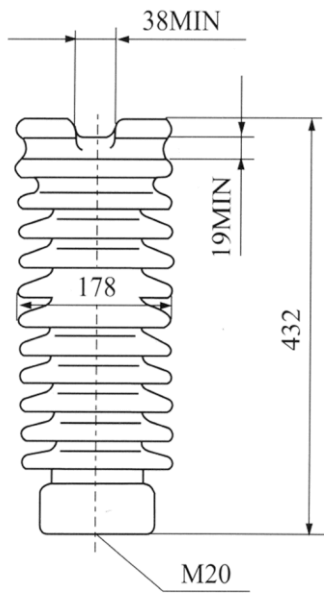

ANSI Class 57-4

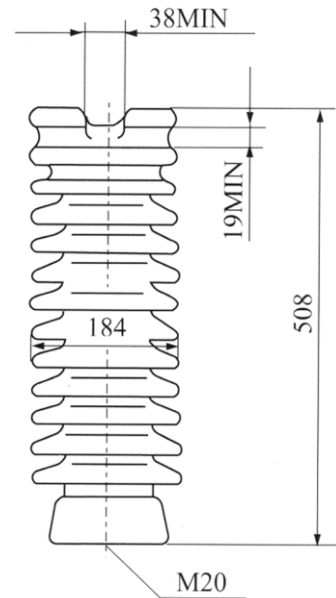

ANSI Class 57-5

Standard Specification : ANSI C29.7

Catalog Number		5704	5705
ANSI Class		57-4	57-5
Stud Cat No.		5706-2 or 5706L-1	5706-2 or 5706L-1
Creepage Distance	mm	1015	1145
Dry Arcing Distance	mm	368	438
Cantilever Strength	kN	12.5	12.5
Low Frequency Flashover Voltage	Dry	kV	150
	Wet	kV	125
Critical Impulse Flashover Voltage (1.2 X 50µm)	Positive	kV	255
	Negative	kV	340
Radio Influence Voltage	rms to ground	kV	44
	Max. RIV at 1000KHz	µV	200
Net Weight, Each, Approx.	kg	16	23
Number in Standard Package	pcs	2	2

Notes : These catalog numbers represent the unit without stud. See page 12 for stud.

