


Vertical Mounting Line Post Insulators



The following line post insulators comply with the American Standard ANSI. The glaze colour of the insulators are brown or light gray, etc.,

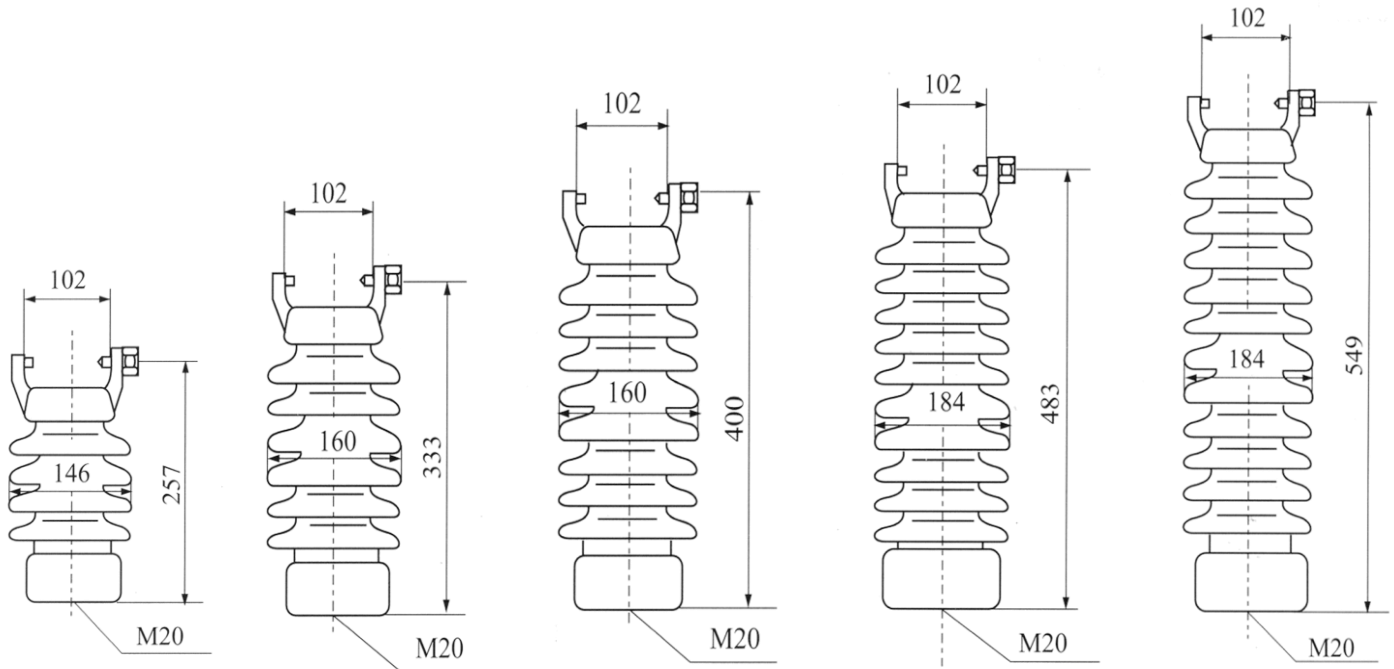

NSI Class57-11

ANSI Class57-12

ANSI Class57-13

ANSI Class57-14

ANSI Class57-15

Standard Specification : ANSI C29.7

Catalog Number		5711	5712	5713	5714	5715
ANSI Class		57-11	57-12	57-13	57-14	57-15
Stud Cat No.		5706-2 or 5706L-1	5706-2 or 5706L-1	5706-2 or 5706L-1	5706-2 or 5706L-1	5715-1
Creepage Distance	mm	356	559	737	1015	1145
Dry Arcing Distance	mm	165	241	311	368	438
Cantilever Strength	kN	12.5	12.5	12.5	12.5	12.5
Low Frequency Flashover Voltage	Dry	kV	80	110	125	175
	Wet	kV	60	85	100	150
Critical Impulse Flashover Voltage (1.2 X 50µm)	Positive	kV	130	180	210	290
	Negative	kV	155	205	260	380
Radio Influence Voltage	rms to ground	kV	15	22	30	44
	Max. RIV at 1000KHz	µV	100	100	200	200
Net Weight, Each, Approx.		kg	6.8	10	11.8	15.9
Number in Standard Package		pcs	6	3	3	2

Notes : These catalog numbers represent the unit without stud and clamp. See page 12 for studs and clamps.

