


Horizontal Mounting Line Post Insulators



The following line post insulators comply with the American Standard ANSI. The glaze colour of the insulators are brown, light gray, etc.,.

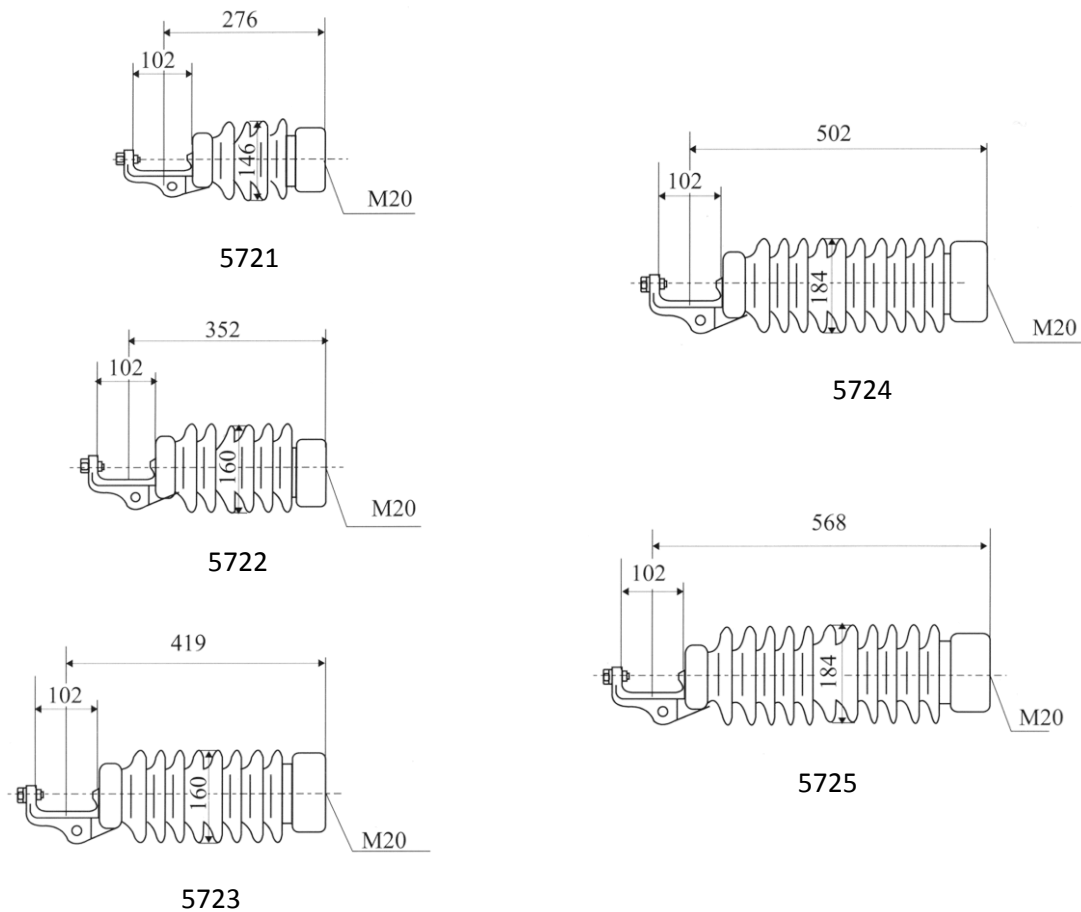

Catalog Number		5721	5722	5723	5724	5725
ANSI Class		57-21	57-22	57-23	57-24	57-25
Stud Cat No.		5706-2 or 5706L-1	5706-2 or 5706L-1	5706-2 or 5706L-1	5706-2 or 5706L-1	5715-1
Creepage Distance	mm	356	559	737	1015	1145
Dry Arcing Distance	mm	165	241	311	368	438
Cantilever Strength	kN	12.5	12.5	12.5	12.5	12.5
Tension Strength	kN	22.2	22.2	22.2	22.2	22.2
Low Frequency Flashover Voltage	Dry	kV	80	110	125	175
	Wet	kV	70	100	115	160
Critical Impulse Flashover Voltage (1.2 X 50µm)	Positive	kV	130	180	210	290
	Negative	kV	155	205	260	340
Radio Influence Voltage	Test Voltage	kV	10	22	30	44
	Max. RIV at 1000KHz	µV	100	100	200	200
Net Weight, Each, Approx.	kg	7.5	10.5	12.7	16.8	19.5
Number in Standard Package	pcs	3	3	3	2	2

Notes : These catalog numbers represent the unit without stud and clamp. See page 12 for stud.

