



Low Voltage Porcelain Insulators Spool Type Application



WOOJIN Electric & Power Co., LTD.


Research & Development Institute/Science and Technology Agency

4-1B-1L, Industry Several 4 Only, Sindang, Sandong, Gumi, Gyeongbuk, Korea 730-853
www.woojinenp.com

TEL (82)54-476-0013~16, FAX (82)54-476-0017



Mechanical & Electrical characteristics

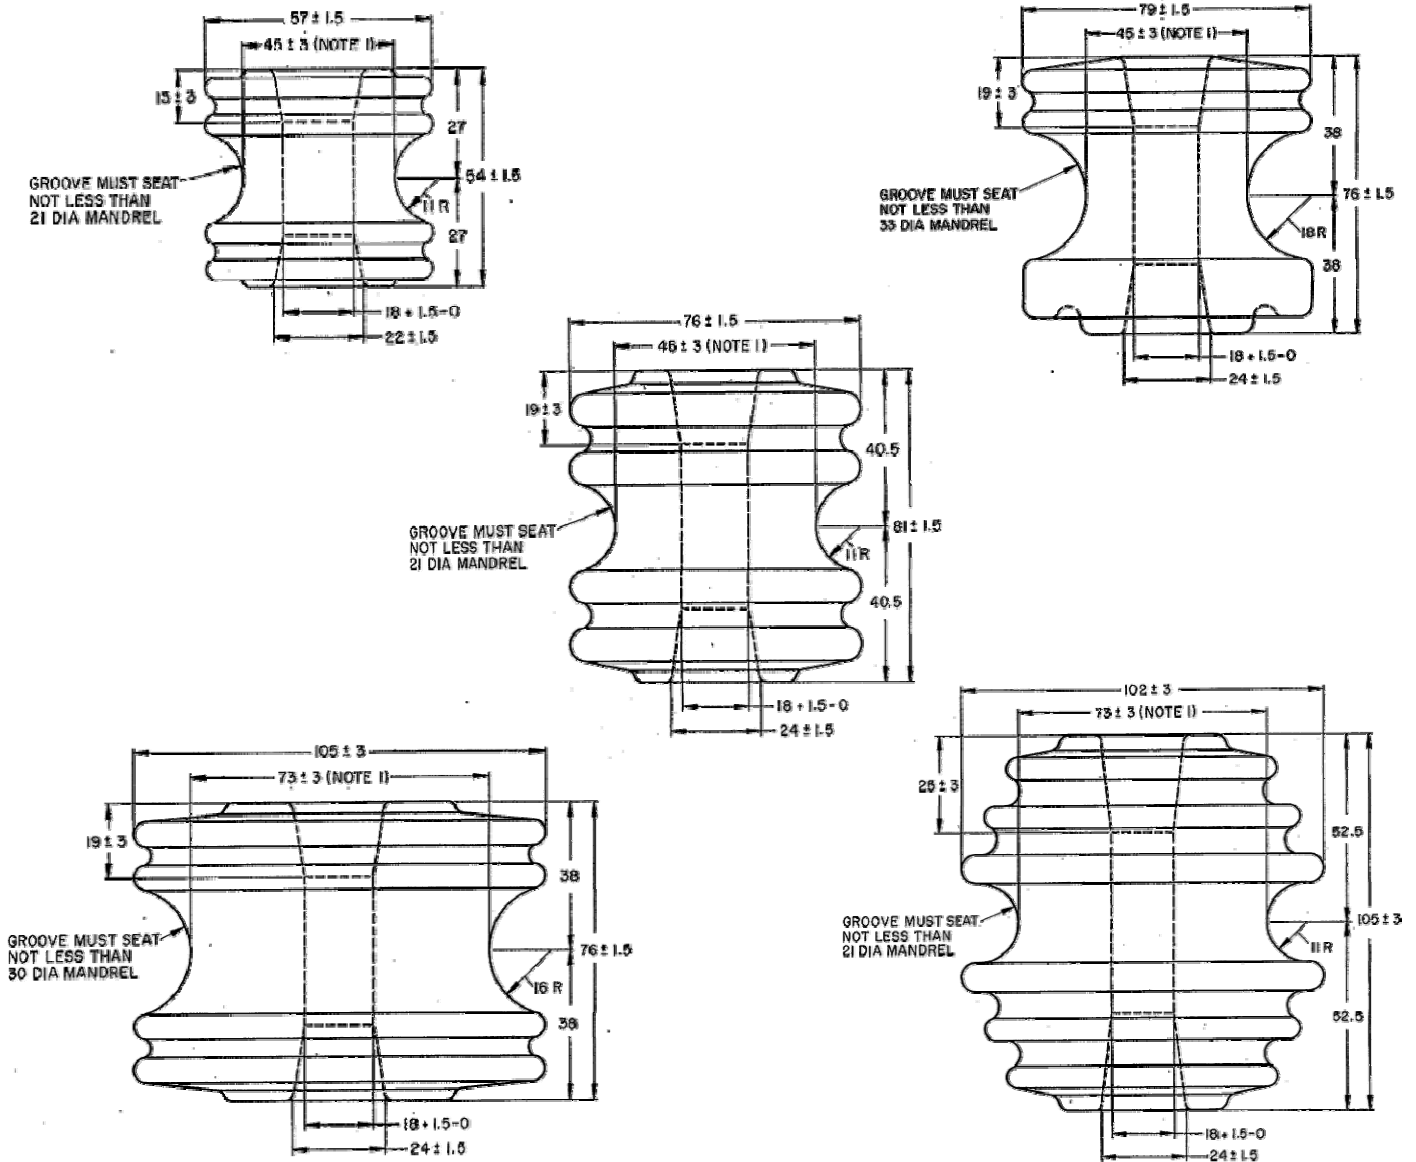

< All dimensions are in millimeters >

| WEP Catalog Number | | 5301 | 5302 | 5303 | 5304 | 5305 |
|-----------------------------|-----|------|-------|-------|-------|-------|
| ANSI Class | | 53-1 | 53-2 | 53-3 | 53-4 | 53-5 |
| Neck Designation (Note 1) | | A | A | A | F | F |
| Transverse Strength | N | 8900 | 13300 | 17800 | 20000 | 26700 |
| Low Frequency Dry Falshover | KV | 20 | 25 | 25 | 25 | 35 |
| Low Frequency Wet Falshover | | | | | | |
| Vertical | kV | 8 | 12 | 12 | 12 | 18 |
| Horizontal | kV | 10 | 15 | 15 | 15 | 25 |
| Net Weight | kg | 0.23 | 0.55 | 0.55 | 1.11 | 1.3 |
| No. in Standard Package | pcs | 60 | 50 | 50 | 25 | 25 |

The glaze color of the insulator is light gray
 All requirements are to meet or exceed ANSI C29.3

